

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 06-256733  
 (43)Date of publication of application : 13.09.1994

(51)Int. Cl.

C09J 7/02  
 C09J 7/02  
 C09J 7/02  
 B32B 27/00  
 H01L 21/52  
 H01L 23/40  
 // B32B 7/10  
 C08J 5/12

(21)Application number : 05-241322  
 (22)Date of filing : 28.09.1993

(71)Applicant : TORAY IND INC  
 (72)Inventor : KOMURA MAKOTO  
 YOKURA MITSUYOSHI  
 MIURA YASUO  
 KOMINAMI KAZUHIKO

(30)Priority


Priority number : 04263618 Priority date : 01.10.1992 Priority country : JP

(54) HEAT-RESISTANT ADHESIVE MATERIAL

(57)Abstract:

PURPOSE: To obtain an adhesive material having excellent electrical characteristics, chemical resistance, low water-absorptivity and high dimensional stability and useful for fixing a lead frame, etc., by laminating a specific heat-resistant adhesive to a surface of a polyphenylene sulfide resin film.

CONSTITUTION: This adhesive material is produced by coating (A) at least one surface of a polyphenylene sulfide resin film such as a film treated with corona discharge or low-temperature plasma with (B) a heat-resistant adhesive comprising a polyimide resin thin film produced by imidating a polyamic acid derived from an aromatic tetracarboxylic acid and a diamine component containing <math>\geq 5\text{mol}\%</math> of the diamine of the formula ((n) is <math>\geq 1</math>; R1 and R2 are lower alkylene or phenylene; R3 to R6 are lower alkyl, phenyl or phenoxy) as at least one of the coating layers.

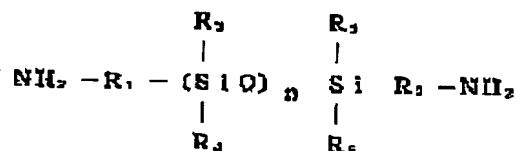

LEGAL STATUS